

# **PVC EXTRUSION**

## **PLASTIFLEX ABN2**

**PVC membrane with high rubber content Hydrocarbons, Oils, acid/alkaline solutions, Sewages and Bitumen resistant**

**IN ACCORDING TO DIN 16937 NORM**

### **MEMBRANE FORMULATION**

**PLASTIFLEX ABN2** is a special PVC compound added with high content of **Rubber, elastomeric** product which provides high plasticizers absorption and resistance to **Oils, Solvents, Bitumen and sewages** keeping unaltered mechanical and physical properties of the membrane.

### **APPLICATION FIELDS**

- lining in contact with ground or water polluted with hydrocarbons, oils, bitumen and sewages, acid and alkaline solutions. High flexibility in cold temperature
- protection of petrol service stations areas, multi-storey car parks.


### **WELDING SYSTEMS**

**PLASTIFLEX ABN2** is an easily weldable membrane using a manual hot air gun or fully automatic self propelled machinery.

In case of necessity special solvents can be used to seal the joints.

### **COLOUR**

**Light grey** when UV resistant requested otherwise black.

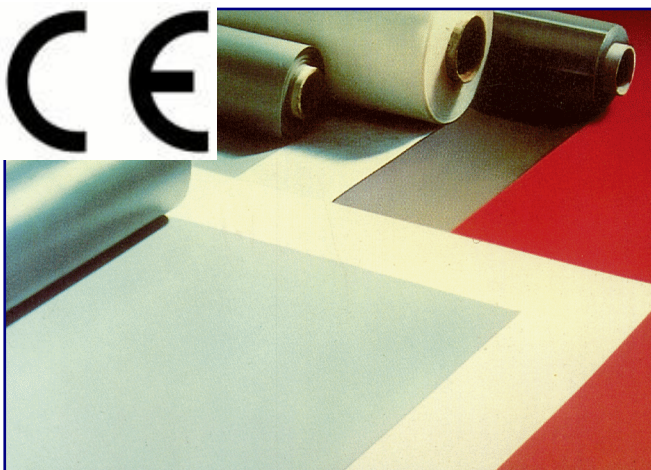

RICERCA APPLICATA MONTEDISON

**GOOD YEAR**

*plastiflex*