


PLASTIFLEX VERTICAL FLANGE

Dimensions	H: 200 mm , Ø 29 – 19 – 10 mm		
TEST	NORM	UNIT	VALUE
Hardness	ISO 868	Shore A	75 ± 3
Weight density	ISO 1183	G/cc	1.24 ± 0.03
Tensile strength	ISO 527	N/mm ²	15
Elongation at break	ISO 527	%	390
Cold flex	ISO 458/2	°C	-25 ± 2
Color	white		

Characteristics: The injection pipe has a smooth flange to improve the adhesion to prefabricated felts in PVC.

Raw material contains anti UV.

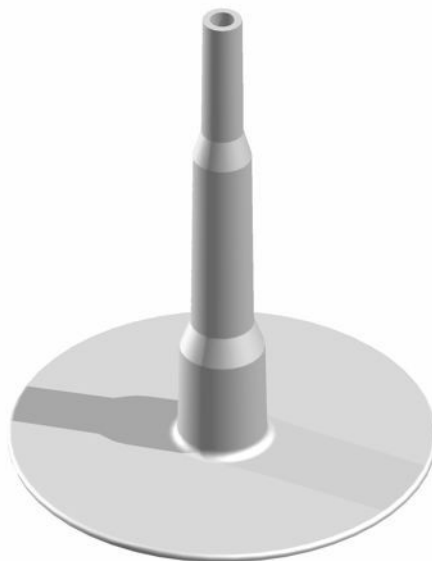

PLASTISELL S.R.L. Via Gravellona 2 - 28071 Borgolavezzaro (NO) ITALY
Tel. +39 0321 885106 - 885351 Fax. + 39 0321 885550, E-Mail: info@plastisell.it – www.plastisell.it

